

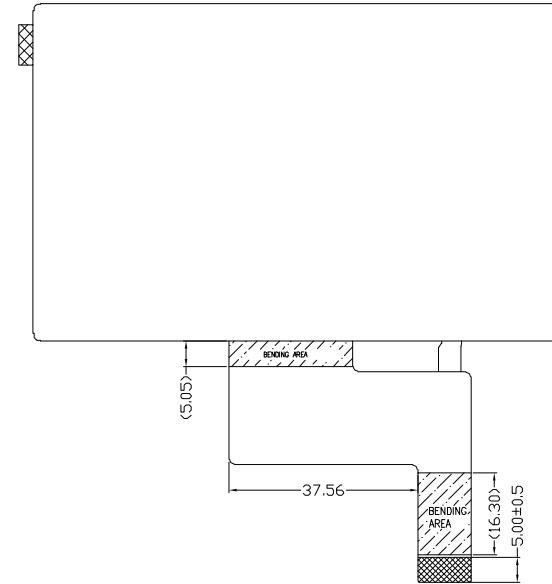
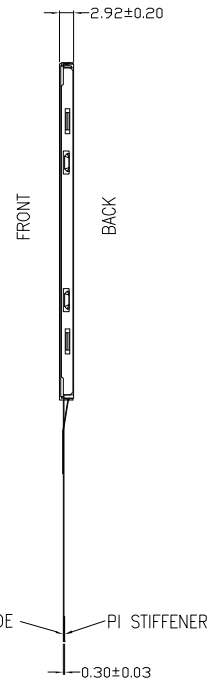
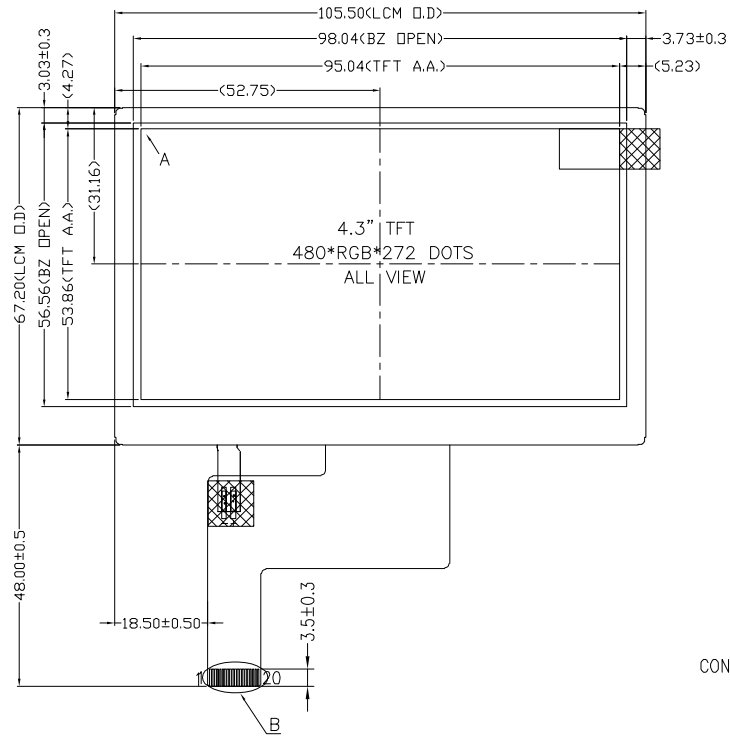
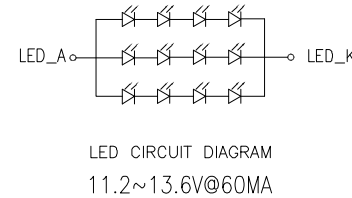


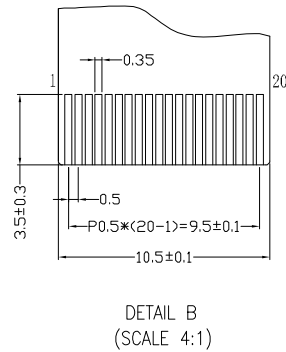

PIN DESCRIPTION FOR LCM					
PIN NO	SYMBOL				
1	VDD				
2	VDDI				
3	GND				
4	RESET				
5	GND				
6	CS				
7	SCL				
8	GND				
9	SDA				
10	DCX				
11	NC				
12	SPI4W				
13	GND				
14	TE				
15	GND				
16	IM0				
17	IM1				
18	IM2				
19	LED_A				
20	LED_K				

DCX IS PULL HIGH OR OPEN WHEN NO USE



Display Type	4.3" TFT
	TRANSMISSIVE,NORMALLY BLACK
Optimum Viewing Direction	ALL VIEW
Upper Polarizer Type	ANTI-GLARE
LCD Driver IC	NV3041
Operating Voltage	VDD=3.3V
Operation Temperature	-30°C TO 80°C
Storage Temperature	-40°C TO 85°C
Backlight	12-CHIP WHITE LED
Surface Luminance	1100cd/m2(TYP)
Interface	3/4-WIRE SPI

DISPLAY INDUSTRIAL SOLUTIONS VISIONS					
DRAWN BY:		Jackie		MODULE P/N:	
CHECKED BY:					
APPROVED BY:				EA TFT043-42SINN	
UNIT	mm	SCALE	1/1		
3rd Angle		SHEET OF 1/1			

NOTES:
1. General Tolerance: ±0.2
2. ()reference dimension.
3. Recommended Case Open Area Should Be Less Than Module V.A(BZ Open).
4. This module is RoHS compliant.